

FIGURE 1 SINGLE PARKING STALLS

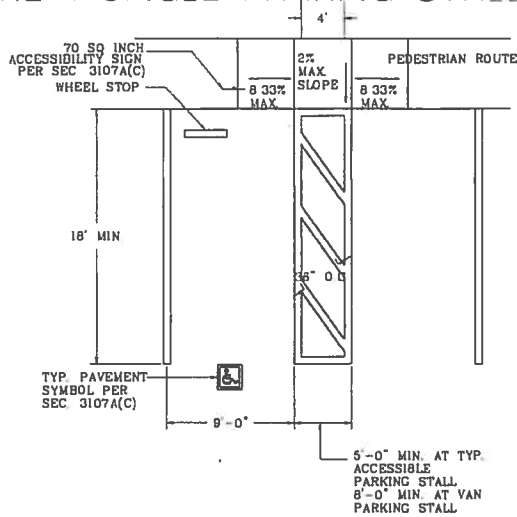


FIGURE 2 DOUBLE PARKING STALLS

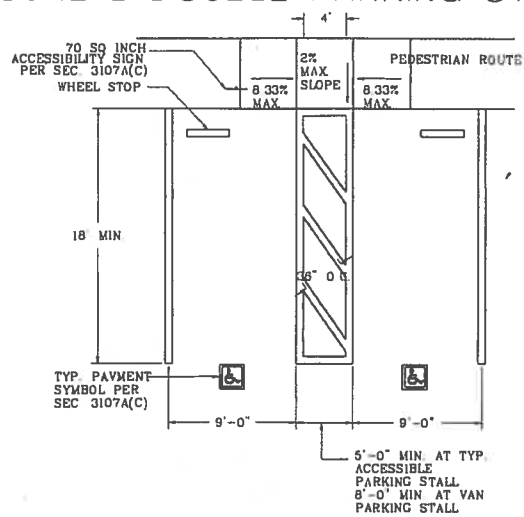


FIGURE 3 DIAGONAL PARKING STALLS


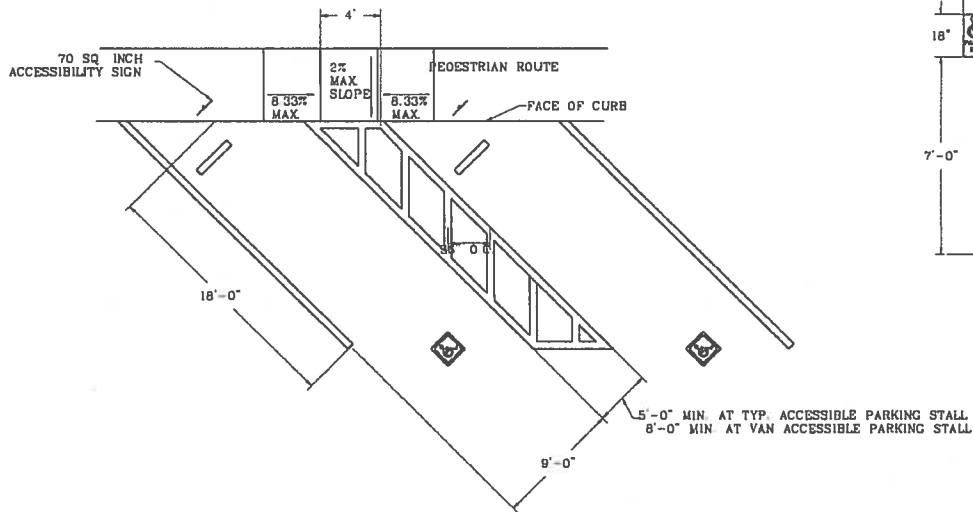


FIGURE 4 POSTED SIGN

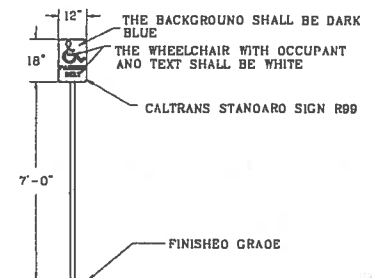

NOTES:

- One in every eight accessible spaces, but not less than one, shall be served by an access aisle 8 feet wide and shall be designated van accessible.
- Each accessible parking space shall be identified by a permanent reflectorized sign adjacent to and visible from each space. The sign shall contain a profile view of a wheelchair with occupant in white on a dark blue background. The sign shall not be smaller than 70 square inches and when in a path of travel shall be posted at a minimum height of 7 feet above finished grade (see figure 4).
- Care should be taken to avoid creating an undulating sidewalk when there are more than two Handicap spaces in a row.

REQUIRED NUMBER OF DISABLED SPACES

Total Number of Parking Spaces in Lot or Garage	Minimum Required Number of Spaces
1 to 25	1
26 to 50	2
51 to 75	3
76 to 100	4
101 to 150	5
151 to 200	6
201 to 300	7
301 to 400	8
401 to 500	9
501 to 1000	*
1001 & over	**

* Two percent of total

** Twenty plus one for each 100, or fraction thereof over 100

Transportation Division
CITY OF MENLO PARK

APPROVED:

Transportation Manager

DATE:

3/28/96

dsable2.dwg

HANDICAP PARKING DESIGN GUIDELINES