




NOTES

1. PLACE 3 SACK LEAN CEMENT SLURRY MIX BACKFILL WITHIN THE DAY OF CUTTING
2. ALLOW SLURRY TO SET 12 HOURS BEFORE PLACING ASPHALT CONCRETE IN TRENCH
3. SAND REQUIREMENT MAY BE WAIVED IN SOFT SOIL AT THE CITY ENGINEER'S DISCRETION
4. PAVING TO FOLLOW WITHIN A MAXIMUM OF 24 HOURS FROM EXCAVATING

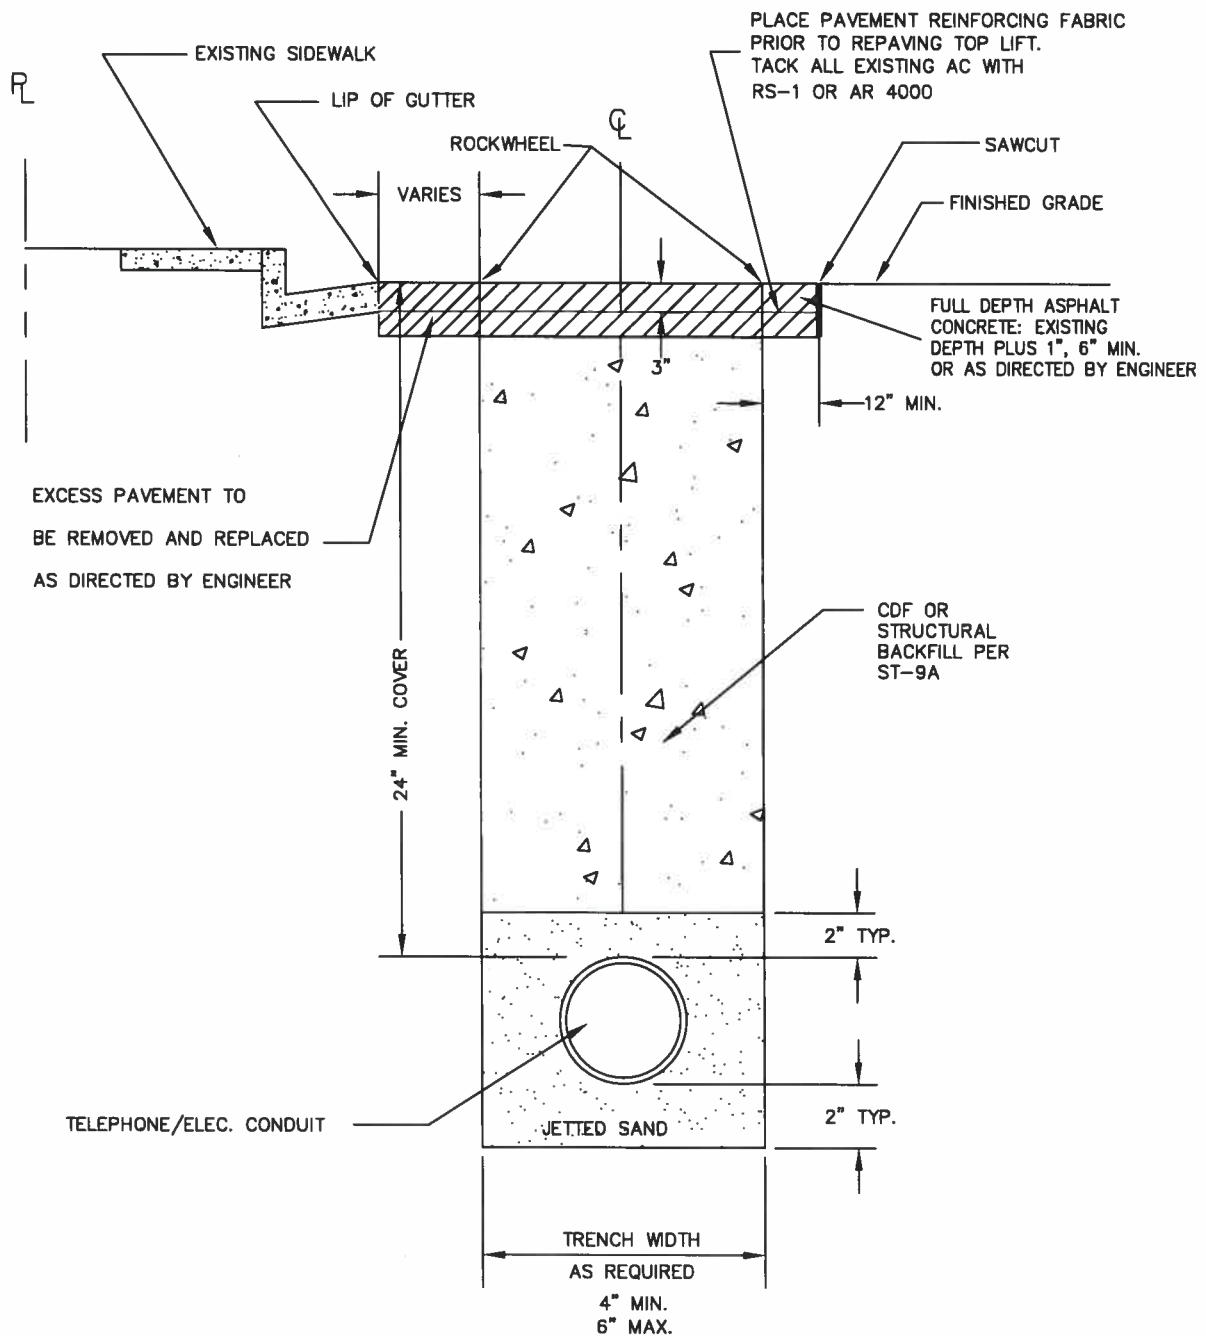

CITY OF MENLO PARK STANDARD DETAILS

TELCO ROCKWHEEL TRENCH

APPROVED

ENGINEERING SERVICES MANAGER, W.C.E. No.C64366

STD. DETAIL No. ST-10

DRAWN	CHECKED	DATE	SCALE	SHEET
JO	VP	9/25/13	NTS	1 OF 1